

NEW

ELMO

EDP-X80

LCD DATA PROJECTOR



**The XGA high-resolution with 2400lm bright output in 3.3 kgs truly portable body
- that's the new standard for multimedia projector, now available from
ELMO with many user-friendly features.**

- 2400 ANSI lumens high brightness
- Only 3.3 kgs in weight for true portability with carrying handle and bag
- XGA native & SXGA / UXGA compressed
- Beautiful video image & HDTV compatible
- 1.25x optical zoom plus digital zoom
- Digital keystone correction (Up / Down $\pm 15^\circ$)
- Mouse control remote with laser pointer
- DVI / USB / RS-232C terminals

**With the combination of ELMO HV series XGA Presenter,
computer data, video tape but also the real material
(printed material, slide film, 3D object, etc) can be projected clearly and vividly.
*ELMO is the Solution for on-site presentation
and productive meeting.***

ELMO

Visualizing technology since 1921


LCD DATA PROJECTOR EDP-X80

SPECIFICATIONS

Power	Power source	AC 100-240V, 50/60Hz
	Power consumption	265W
Optical	LCD panel	0.9-inch active matrix TFT x 3
	Number of pixels	1024 x 768 x 3
	Resolution	Video : 500 TV lines RGB : 1024 x 768 dots
	Light source	190W UHM(EDPL80)
	Brightness	2400 ANSI lumens
	Contrast ratio	400 : 1
	Lens	F1.9-2.3, f=33.6-44.5mm
	Optical zoom	Manual (1.25x)
	Digital zoom	Provided (RGB: 10x or Video: 3x)
	Focus	Manual
	Image size	32 - 300 inches diagonal
	Projection distance	1.50m - 11.74m
General	Keystone correction	Digital Auto : Vertical $\pm 15^{\circ}$ Manual : Vertical $\pm 15^{\circ}$
	Computer compatibility	VGA, SVGA, XGA, SXGA (compressed), UXGA (compressed)
	Video compatibility	NTSC, PAL, SECAM PAL-N, PAL-60, Component video (Y/PB/PR), HDTV (1080i/720p)
	Speaker	1.0W (monaural)
	Noise	32-33dB at whisper mode(35db at normal mode)
In/Out terminals	COMPUTER IN 1	D-sub 15p x 1 for Analog RGB & Y/PB/PR
	COMPUTER IN 2	D-sub 15p x 1 for Analog RGB
	VIDEO input	Composite video : RCA jack x 1 S-Video : Mini-Din 4P x 1
	AUDIO input	RCA (L/R) jack x 2 for Video/S-video $\phi 3.5$ stereo Mini jack x 1
	MONITOR output	D-sub 15P x 1
	USB	USB type B x 1
	RS-232C control	Mini-Din 8P x 1
Others	Foot adjuster	One-push plus fine adjustment
	Carrying handle	Provided
	Carrying bag	Supplied
	Wireless remote control	Supplied (with mouse control & laser pointer)
	Dimensions (WxHxD)	298 x 97 x 249mm
	Weight	3.3 kgs

Note : Weight and dimensions are approximate.
Design and specifications are subject to change without prior notice.


PROFILE

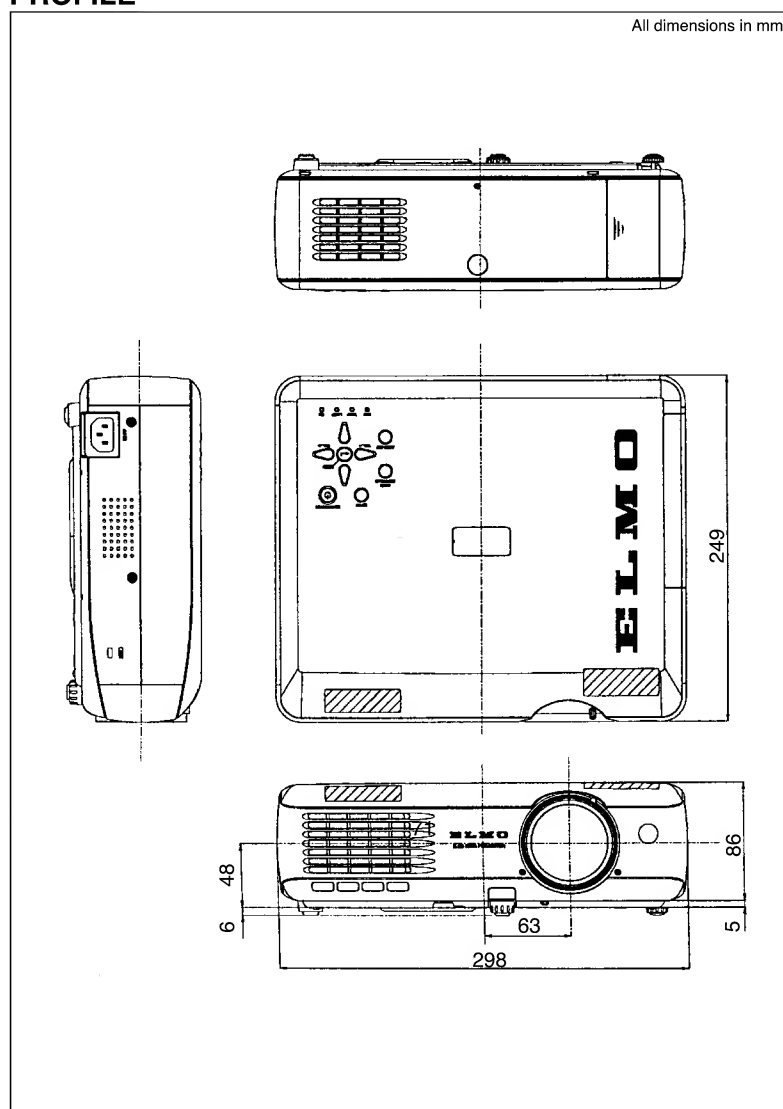

Other ELMOs to give your presentations amazing diversity!



High-Resolution Visual Presenter, HV-5500XG
XGA resolution of 1/3" 850,000 pixels CCD

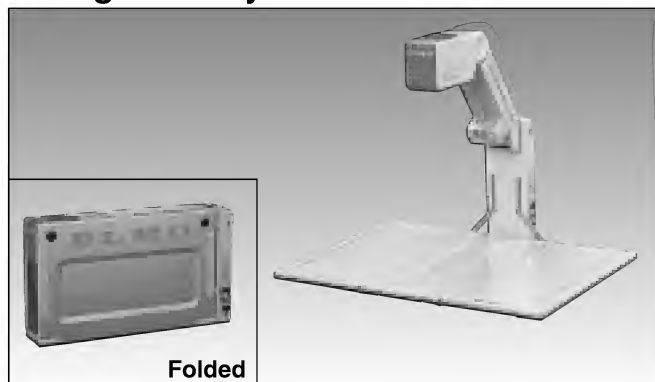

High Resolution Mobile Presenter, HV-100XG
XGA resolution of 1/3" 850,000 pixels progressive-scan CCD

ELMO and **ELMO** are trademarks and/or registered trademarks of ELMO COMPANY, LIMITED.

ELMO ELMO CO., LTD.

6-14, Meizen-cho, Mizuho-ku,
Nagoya, 467-8567, Japan
E-Mail: foreign-div@elmo.co.jp
Tel. 81-52-821-3141 Fax. 81-52-811-5243

Additional technical information is available from any of the following subsidiary companies;

ELMO (Europe) G.m.b.H.
Neanderstr 18,
40233 Düsseldorf, Germany
Tel. 0211-376051-53 Fax. 0211-376630
E-mail: elmo@elmo.co.jp
Web: <http://www.elmo.de>

ELMO Mfg. Corp.
1478 Old Country Road,
Plainview, NY 11803-5034, U.S.A.
Tel. 516-501-1400 Fax. 516-501-0429
E-mail: elmo@elmousa.com
Web: <http://www.elmousa.com>

ELMO Canada Mfg. Corp.
44 West Drive, Brampton,
Ontario, L6T 3T6, Canada
Tel. 905-453-7880 Fax. 905-453-2391
E-mail: info@elmocanada.com
Web: <http://www.elmocanada.com>